



# HSM Powerline SP 5088 - 6 x 40-53 mm




## HSM Powerline SP 5088 shredder baler combination

With this waste disposal station, HSM combines the FA 500.3 heavy duty document shredder with a channel baling press. It is therefore perfect for use in archives or central stations for shredding large quantities of documents, which are then compressed into bales of up to 90 kg.

### Technical data

<b>Order number:</b>	2990414134	<b>Voltage / Frequency:</b>	400 V / 50 Hz
<b>EAN</b>	4026631060301	<b>Intake width:</b>	500 mm
<b>Cutting type:</b>	particle cut	<b>Bale width x Bale height x Bale length:</b>	500 x 500 x 400-950 mm
<b>Cutting width:</b>	6 mm	<b>Bale weight (up to):</b>	90 kg
<b>Particle length:</b>	40 - 53 mm	<b>Width x Depth x Height:</b>	1273 x 3281 x 1792 mm
<b>Security level (DIN 66399):</b>	E-2   O-2   P-3   T-3	<b>Weight:</b>	1660 kg
<b>Cutting capacity in sheets 80g/m<sup>2</sup>:</b>	300 - 350	<b>Shredder material:</b>	Paper, Staples and paper clips, Credit card, CD/DVD, Folders, USB sticks, Crumpled paper, Floppy disk, Computer listings
<b>Pressing power:</b>	85 kN		
<b>Driving power:</b>	11,5 kW		

### Product information




The material feeding is convenient and takes place via the non-slip conveyor belt.



We have integrated an automatic oiler into the device which will ensure it runs smoothly, giving you a consistently high cutting capacity and quality.



The combination can be commissioned very easily using Plug-and-Play. The conveyor belt-shredder can therefore be combined with a press at any time.

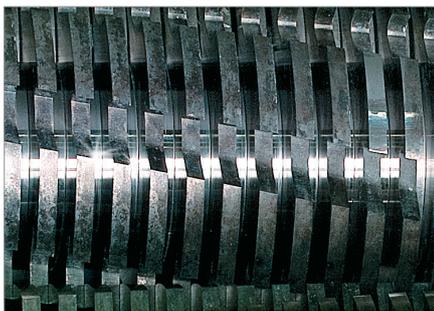

### Specially hardened solid steel cutting rollers

The induction-hardened solid steel cutting rollers are wear-resistant and guarantee durability.



### Continuous operation

Powerful drive allows continuous operation.



### Compression into boxes or waste bag

The shredded material which has been compressed into compact bales can be cleanly disposed of either in a box (HSM SP 4040 V) or a waste bag (HSM SP 4040 V, HSM SP 5080). These prevent particles from falling out and ensure clean handling.



### Bale weight can be manually set

The bale weight is variable and depends on your requirement (HSM SP 5080, HSM SP 5088).



### User safety through emergency off switch

It may be necessary to stop the machine immediately so we have equipped the device with an emergency off switch.



### Dust extractor

The powerful and energy efficient dust extractor HSM DE 4-100 in dust classification M ensures an optimal extraction due to the high air flow volume, thereby reducing dust emissions (accessory).



\*HSM Powerline SP 5080 / SP 5088

