



JBF HD 15/40 Office FLASH

Important Features

- Available in Three-Phase Power Supply version for operation on a CEKON CEE 16A outlet
- At surcharge available in Single-Phase Power Supply version for operation on any standard power outlet with inverter drive
- Slim design to fit through standard office doors
- Single-phase-machine is compliant with DIN 66399 **security level H3, O1 and T2**, three-phase-machine meets DIN 66399 **security levels H4, O1 and T2**.
- Processes up to 60 HDD's per hour
- Handles other data media like CD's, DVD's, magnet tapes, PDA's,...
- Handles in a second integrated cutting unit FLASH media like thumb drives, SD-cards,... in DIN 66399 **security level E3** as well



Intended Range of Application


This machine was designed for operation directly in the IT-department of companies or banks. With its relatively small footprint and the optional single-phase-supply it matches into the office surrounding and provides for immediate disposal of single outdated or damaged HDD's and other data media.

Technical data

		single-phase-version	three-phase-version
Power supply	V / Hz	230V / 50Hz / 1Phase	400V / 50Hz / 3Phase (other voltages are available upon request)
Motor performance	kW	1.5	3.0
Cutting zone 1	mm	150 x 400	150 x 400
Knife width 1	mm	32.5	18.5
Security level 1	DIN	DIN 66399 level H3	DIN 66399 level H4

General technical data for both versions

Feed opening 2	mm	35 x 19
Knife width 2	mm	5.5
Security level 2	DIN	66399 level E3
Machine dimensions	mm	1,225 x 740, 1,275 high
Machine weight	kg	550
Collecting bin volume	litre	88

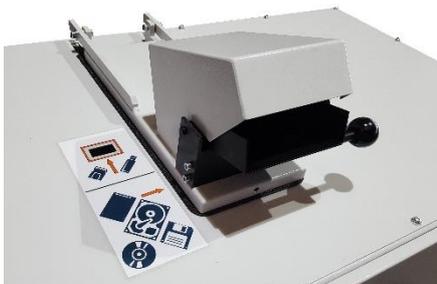

Subject to change without prior notice
All values are approximate